EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER

2001150559

PUBLICATION DATE

05-06-01

APPLICATION DATE

26-11-99

APPLICATION NUMBER

11336561

APPLICANT: OKAYAMA SEKISUI KOGYO KK;

INVENTOR: KAWACHI FUJIO;

INT.CL.


B29C 70/30 // B29K 35:00 B29K105:12

TITLE

: FIBER-REINFORCED RESIN MOLDING

AND METHOD FOR MANUFACTURING

THIS RESIN MOLDING

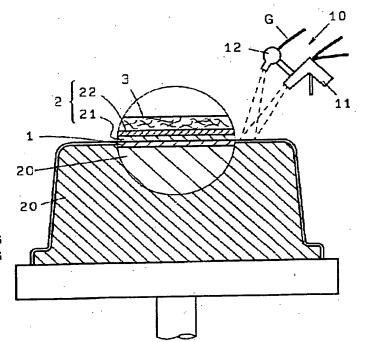

ABSTRACT :

PROBLEM TO BE SOLVED: To provide a fiber-reinforced resin molding with a presentable appearance showing such advantages that a defoaming ope. Ition is easy and the productivity can be enhanced and further, the presence of air bubbles between a fiber-reinforced layer and a corrugated layer is almost not allowed without the generation of warpage due to heat shrinkage or curing shrinkage after molding and also the generation of a glass mark as well as a method for manufacturing this fiber-reinforced resin molding.

SOLUTION: This fiber-reinforced resin molding is structured of an intermediate layer 2 formed of a dicyclopentadiene unsaturated polyester resin containing an inorganic filler between a corrugated layer 1 and a fiber-reinforced resin layer 3. In addition, the fiber-reinforced resin layer 3 is formed of the dicyclopentadiene unsaturated polyester resin.

COPYRIGHT: (C)2001, JPO